




*Bezels available in black, white and satin chrome

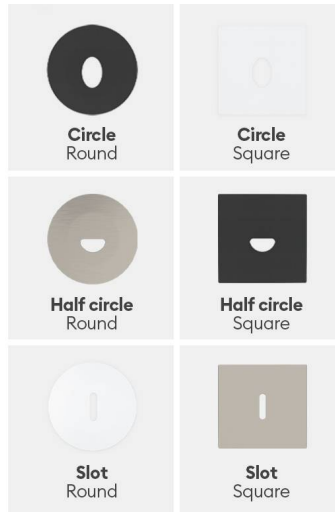

STEPBEAM

Asymmetrical Wall Light

FEATURES

IP rating	IP54
IK rating	IK04
CSP Switchable	Single CCT
Tilttable (°)	Fixed
Dimmable Option	Yes (Mains)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>90
Colour Consistency	SDCM3
Emergency Option	No
Rotation angle (°)	Fixed

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-10°C - 40°C
Weight	25kg
Inrush Current	1.05A 0.05ms
Cut Out Size	45
Construction Material	Die-cast aluminum
UK Bathroom Zone	N/A
Electric Class (1, 2, 3)	I

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
STEPBEAM30	Bezel sold separately	2.7W	3000K	30° to 45°	See Bezel Accessories	See Bezel Accessories	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	170mm, 2x 0.75mm Live & Neutral
Type of Wiring Required	Parallel

ACCESSORIES

Stepbeam Bezels	Round or Square, Circle, Half circle or slot bezels	Sold Separately
-----------------	---	-----------------


COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

-  2.7W
-  Quick and easy installation
-  IP54 rated for interior use

WARRANTY

Warranty 5 years

FEATURES & BENEFITS

- Interchangeable faceplate with magnetic design
- High quality powder coating finish from AkzoNobel
- Colour choice of white, black or satin chrome
- Shape choice of square or round
- Compatible with leading and trailing edge phase cut dimmers

BEAM ANGLE: 30° to 45°

